




JES 120AU

JES 120AU

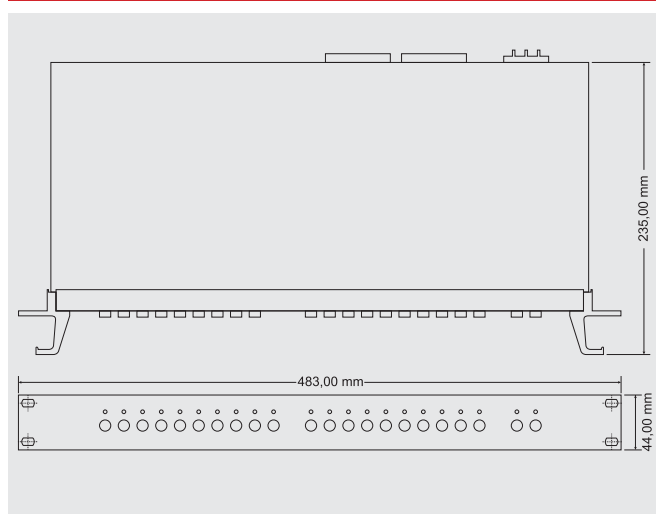

Emergency interface

This device is connected to the Fas and report status of all FAS zones to teh JRG 220AU relay matrix. User can set alarms on in different zones.

Technical datas

- 20 contact inputs for fire-detection or emergency
- emergency zone speaker selector with individual LED indicators for use with JRG-220A
- digital communication with JRG-220A via RS485
- in case of emergency, all normal announcements will be stopped
- equipment operation and TX status report to JCU-160 (E/M Check Unit) - „U type“ only

- speaker controls 20 Lines
- fire directors 20Lines
- power consumption 3.6 W (All Operation)
- power DC 24 V
- dimensions 483(W) × 44(H) × 200(D) mm
- weight 3.3 kg

Cat. nr.: 271044

pc