




JDR 104

JDR 104

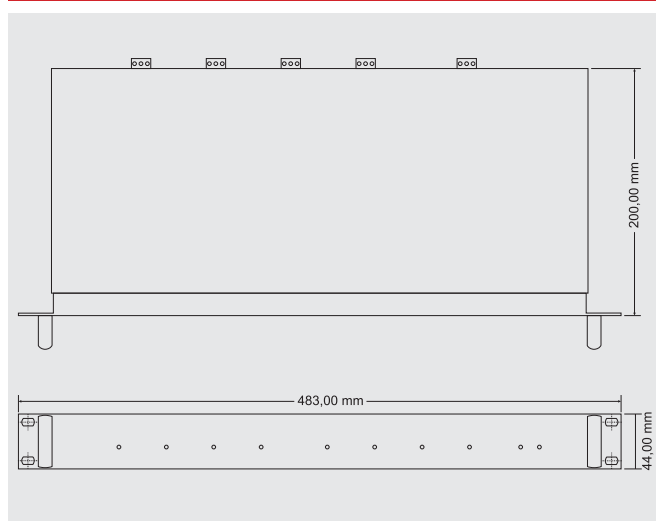

Paging microphone receiver

This device is connected to the JRA 051A or B and output is connected to the main relay matrix JRG 220AU. It cumulates JRA paging microphones to the one data and audio cable.

Technical datas

- up to 4pcs of JRA-051A/B can be connected
- 4 „BUSY“ LED indicators to monitor the status
- 4 „POWER“ LED indicators to check the operation
- RS485 data communication to JRA-051A/B (UTPcat 5)
- superior audio circuit for the long distance with balanced circuit (separate cable)
- overall priority (E/M) will mute all JRA-051A/B
- input sensitivity / impedance nor. +4 dBu / 600Ω bal
- output level /impedance nor. +4 dBu / 600 Ω bal

- frequency response less than -1 dB(20 Hz-20 kHz)
- signal to noise ratio more than 86 dB
- T.H.D(1kHz) Less than 0.03 %
- power consumption 3.6 W
- power DC 24 V
- dimensions 483(W) × 44(H) × 200(D) mm
- weight 3.0 kg

Cat. nr.: 271026

pc