




JRA 051A

JRA 051A

Paging microphone with zone selection

Desktop microphone with zone selection, chime, priority, and indication of power and busy status.

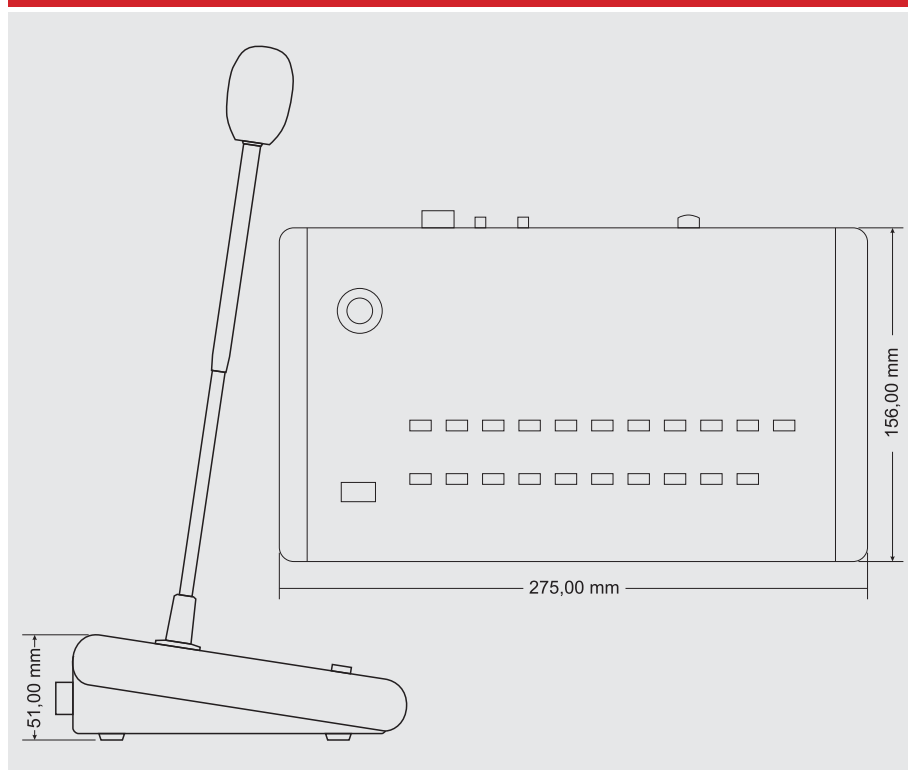

Technical datas

- individual zone selector or „All Call“.
- chime function
- unidirectional microphone to reduce feedback
- data LED indicator
- superior circuit communication by RS485, data via UTPcat5, Audio via 2core shielded
- If more than 1 piece is needed in the system, use JDR-104
- mic Input Level -50 dB
- output level / Impedance +4dBu / 600 Ohm bal.

- frequency response Less than -3dB (200 Hz-20k Hz)
- signal to noise ratio More than 68 dB
- T.H.D Less than 0.05 %
- speaker controls 20 Lines
- power consumption 3 W
- power DC 24 V
- dimensions 275(W) × 51(H) × 156(D) mm
- weight 2 kg

Cat. nr.: 271027

pc