




JCU 160

JCU 160

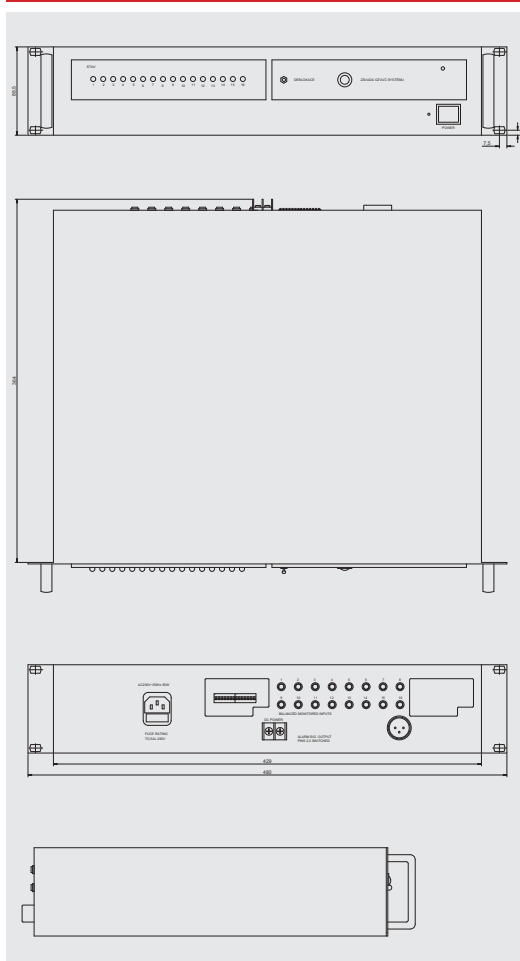

System checker

This equipment is designed for always monitoring the status of equipments that are related to the Emergency Evacuation like JEU-211AU, JRG-220AU, JEP-352U, JSC-132AU, JES-120AU, JES-120AU, JPD-322A, JFA-242U, JFS-381U

Technical datas

- to comply with European EN 60849 standard
- the above 6models should be modified, in order to be monitored by JCU-160
- it has 16channel monitor lines & Self monitoring function
- when detecting the failure of any equipment, detected line LED lamp is blinking with a buzzer sound
- when detecting the failure of any equipment, contact switch(SUM OUT) is operated for outer EM indicator use
- possible to use 16channels for monitoring but you can set „Using / Non-using channel“ by ON/OFF switch in CHANNEL USE
- possible to monitor the equipments status by AV software (DSW 1.0)
- monitor line - 16 Channel
- monitor detection mode - 2 Mode
- monitor detection circuit - 1 Channel
- communication method RS-232C
- communication speed 9600bps
- power consumption 2.6W
- power DC 24V
- dimensions 483(W) x 44(H) x 200(D) mm
- weight 2.5kg

Cat. nr.: 271042

pc