


JEP 352U

JEP 352U

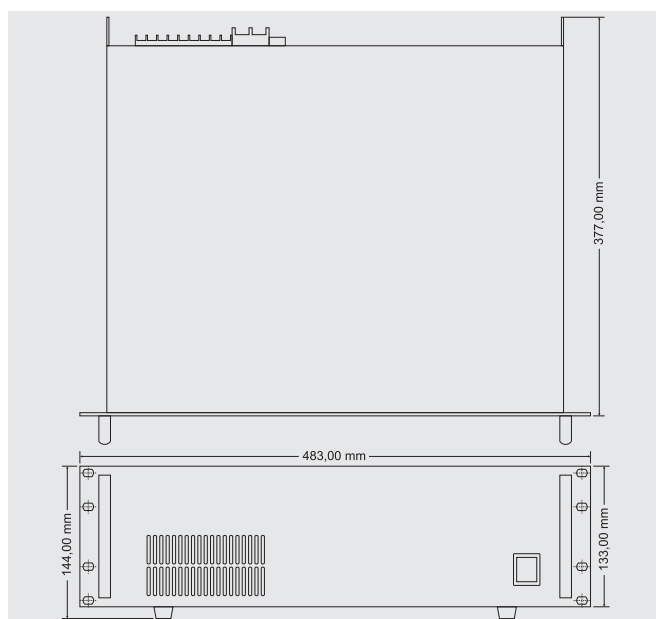

24V power supplier

Main device for 24 V power supply management. It measures, charges and discharge connected 24 V back-up batteries in system.

Technical datas

- permissible battery built-in or use of battery from outside (extended battery)
- automatic battery charge and discharge
- automatic convertible AC power to DC power when unexpected AC power failure
- built-in fuse for 24V DC per output.(Fuse change at the rear)
- protection circuit for battery against over current, over voltage.
- LED indicator for battery charge or rechargable amount.
- an airtight battery built-in makes not leakage of gas when recharging

- protection circuit against mis connecting of +, - polarity
- equipment operation and battery charging status report to JCU-160 (E/M Check Unit) - „U type“ only
- charging off Aprox. 27.3 V DC
- charging current 2.5A limited
- power consumption 105 W
- power(option) AC 220 V /23 V /240 V 50 / 60 Hz, DC 24 V
- dimensions 483(W) × 133(H) × 350(D) mm

Cat. nr.: 271045

pc