


## JPD 322AU

### JPD 322AU

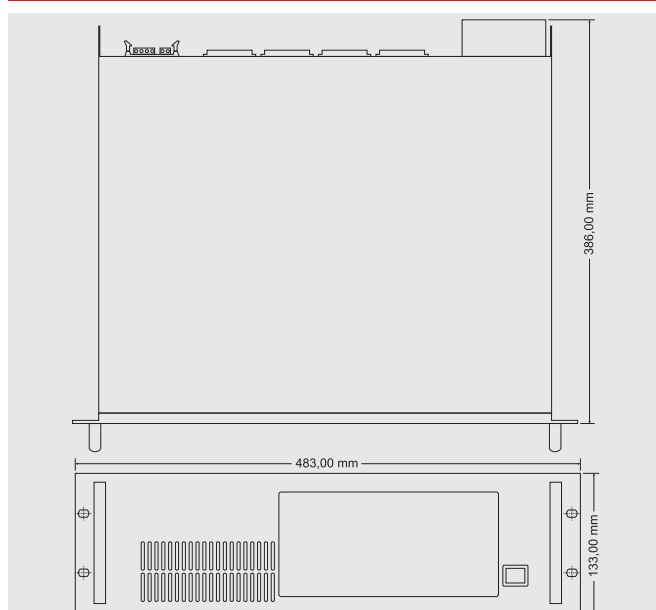

### Main power supplier

It is main device for controlling 230 V power supply to the system. It measure 230 V voltage network and control JEP352U - 24 V power back up supply.

### Technical datas

- 9+1 AC outlets
- 2 24V DC output terminals
- automatic 24V DC power control on emergency situations
- constant power supplying 24V DC to the Remote Amp, E/M speaker selector matrix unit, E/M unit in the rack system (power supply from battery)
- built-in protection against 24V DC output terminal short
- fuse built-in per AC outlet (fuse exchange at the front panel)
- power output delay functions to reduce surge power peak when re-supplying the rack system

- equipment operation status report to JCU-160 (E/M Check Unit) - „U type“ only
- DC power 24 V / 1.5 A Max x 2
- AC power switched 1-6 :230 V AC / 700 0VA (30A), unswitched 7-9 :Each Max 115 VA
- power consumption 120 W (DC Power 24V / 3 A Load)
- power(option) AC 120 V / 230 V / 240 V 50 / 60 Hz (Option)
- dimensions 483(W) × 133(H) × 200(D) mm
- weight 8 kg

Cat. nr.: 271046

pc