


JRG 220AU

JRG 220AU

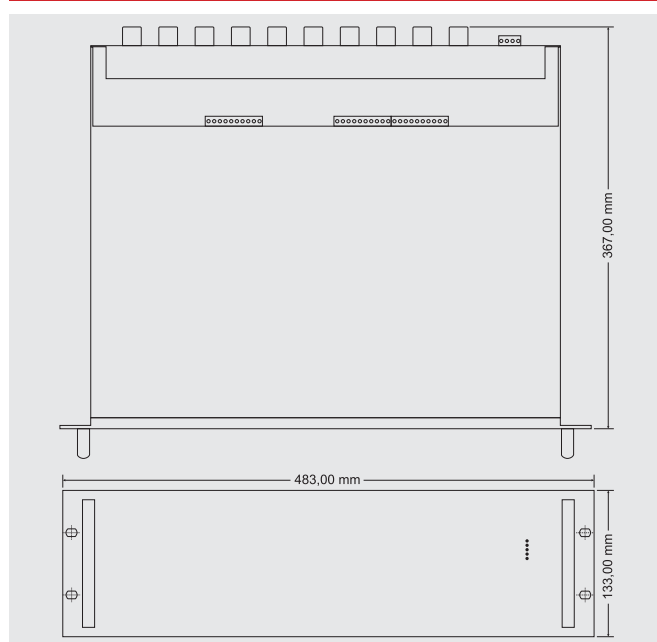

Relay matrix

Main relay matrix for switching 20 inputs to 20 speaker zone outputs with many other switching contacts.

Technical datas

- 20 zone routing system for use with JSS-120A, JEU-211AU, JES-120AU, JDR-104, JRA-051A/B
- suitable for Evacuation- and Emergency applications
- internal priority signal exchanger (cascade)
- easy configuration of every zone by programmable internal matrix
- connection of several microphone-stations(JRA-051A/B, JDR-104)
- priority for passive volume controls by 3-wire & 4-wire system
- RS485 connection for long data communication (up to 1 km)
- equipment operation status report to JCU-160 (E/M Check Unit) -

- „U type“ only
- speaker controls - 20 Lines
- 1 signal exchanger circuit
- speaker line connection - 2-wire, ATT. 3-wire, ATT. 4-wire
- power consumption 11.5 W
- power DC 24 V
- dimensions 483(W) × 133(H) × 350(D) mm
- weight 8.5 kg
- Cat. nr.: 271047**

pc