




JTI 200

JTI 200

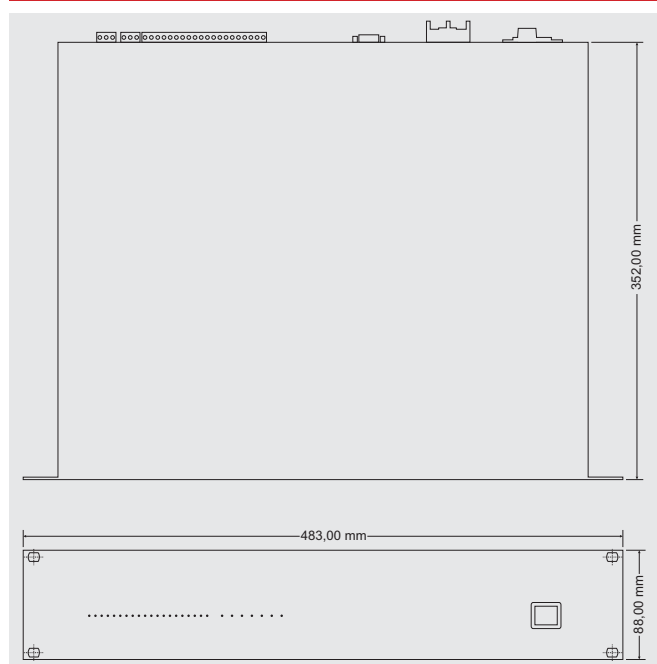

Telephone interface

JTI 200 is device, witch makes normal telephone stations typical desktop microphones. It is interface, witch converts telephone audio signal + data into system signals as call station use. All communications is safed by many passwords.

Technical datas

- all definitions, programing is possible on telephone station, hyper-terminal, telnet via RS 232C
- it is possible to set zones, zone groups, paswords, using etc.
- backup by 24 V DC from system
- dimensions 485x350x90 mm
- weight 2,5 Kg
- power supply AC 230 V \pm 10%, DC 12 V

- back up power supply 24 V
- power consumption 10 VA
- work temperature range 0 - 55°C
- IP 21 class protection
- impedance of tel line 600 Ω
- frequency response 300-3400 Hz

Cat. nr.: 271053

pc