




WA 200RC

WA 200RC

Intercom for counters

Includes microphone + speaker on the client side and counter microphone + small base with speaker and microphone on operator side. Volume adjustment, resistant against sound feedback.

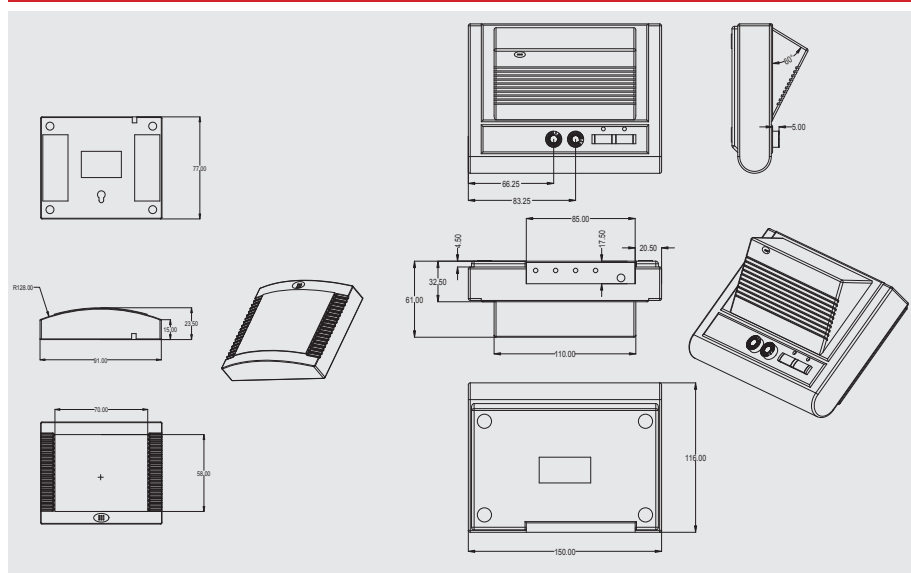

Technical datas

- counter system consisting of two pairs of speaker + microphone
- a variable microphone and interception speaker (base) are installed on the operator, a miniature speaker and microphone are installed on the client window
- settings of microphone gain and volume
- power on and temporary mute button
- speaker power 2 W rms
- freq. speaker range 100 - 15,000 Hz
- freq. microphone range 20 - 16 000 Hz
- outdoor microphone sensitivity - 48 dB (0 dB = 1V / Pa at 1 kHz)
- internal microphone sensitivity - 44 dB (0 dB = 1V / Pa per 1 kHz)
- power supply with DC 9 V adaptor / 500 mA consumption
- base dimensions 150 × 39 × 116 mm
- dimension of v' client loudspeaker 91 × 24 × 77 mm
- very suitable for counters of insurance companies, hospitals, gate-houses, post offices, offices, desks, fast foods, cash counters etc.

Cat. Nr.: 21 937

pc